

## HOW TO ORDER STANDARD ROLLER CHAIN



### YOU MAY ORDER BY 10FT OR 5M IN LENGTH, BOXED PACKAGE

Example: 40 x 10FT Boxed  
08B x 5M Boxed



### OR ORDER LONGER LENGTH, PACKED IN REELS

Example: 25 x 100FT Reeled

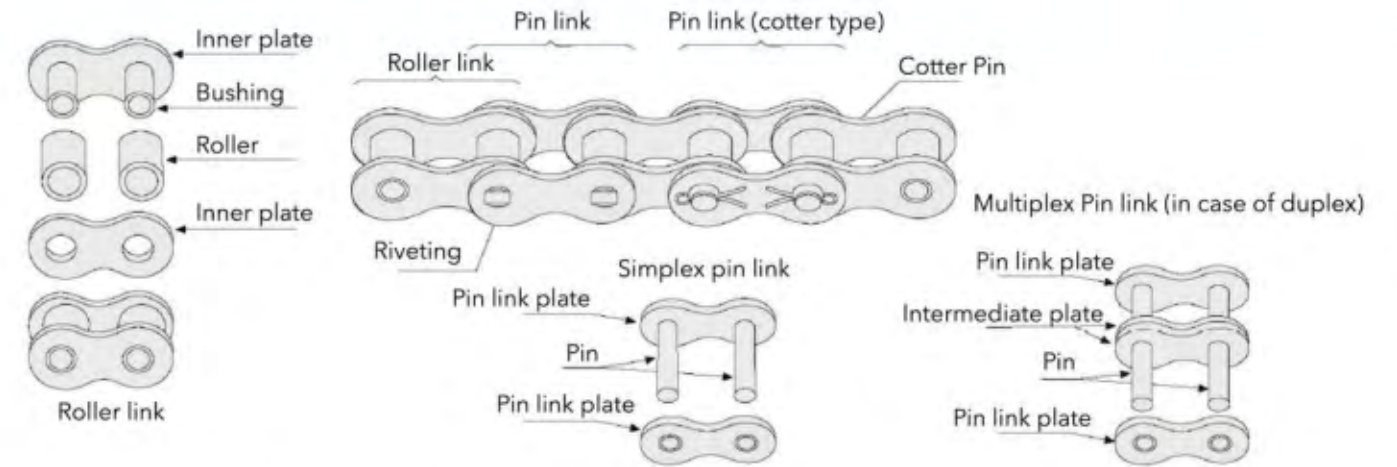

## Components

### Connecting Link



#### Spring Clip Type

Connecting Link (Spring clip type)  
For chains of 3/4" pitch and smaller. Similar to the pin link, except that the detachable plate is slip-fitted to the pins and retained by a spring clip.

### Offset Link



#### Single-Pitch Offset Link

Single-Pitch Offset Link  
Consists of two offset link plates, one special pin, one bushing and one roller. The pin is slip-fitted and retained by a cotter pin.



#### Two-Pitch Offset Link

Two-Pitch Offset Link (Assembly press fit type for single chain only)  
Consists of a single pitch offset link and a roller link assembled together and riveted. The pin is press fitted to the offset link plate.



#### ■ Rivet-Type

#### Pin Link

Consists of two pins and two pin link plates. The pins are press fitted to both plates and riveted after assembly.



#### ■ Cotter-Type

#### Pin Link (Cotter pin type)

Consists of two pins and two pin link plates. The pins are press fitted to both plates. One end of each pin is riveted and the other end is supplied with cotters.



#### Roller Link

Consists of two bushings press fitted to each of the link plates and two rollers. Just enough clearance is provided for the rollers to turn freely over the bushings. The same roller links are used for both single and multiple strand chains.